


PIN	VOLT.	CODE	PNP NO	VALUE	TYPE
D03	+ 3	R 1	216468	10.000k	± 5 %
D04	GND	R 2	217081	130.000	± 5 %
V13	-12	R 3	216445	1.000k	± 5 %
B06	- 3	R 4	216437	430.000	± 5 %
B11	+ 6	R 5	216446	1.100k	± 5 %
		CR 1	241480B	995	
		Z 1	369656	124 P/F	
		Z 2	241481B	194 P/F	
		Z 1	361453	SLT MODULE	
		Z 2	361456	SLT MODULE	
		F 1	241492C	HC MODULE	
		FR			
		FD	311157	CTL-14 SUPPLY	

AA-ALL CIRCUITS MUST CONFORM TO ENG.SPEC. SHOWN ON SHEET 1.
AB-ASSEMBLE TO ENGINEERING SPECIFICATION 890013
AK-CARD HAS BEEN DECOUPLED B11600 IS NOT APPLICABLE.
FA-TECH LAB EVALUATION INCOMPLETE, PART SUBJECT TO WITHDRAWAL.
ADDITIONAL LARGE TO BE AVOIDED
HA-ASSEMBLE WITH ENV. B11157 FROM 16A SPECIFY

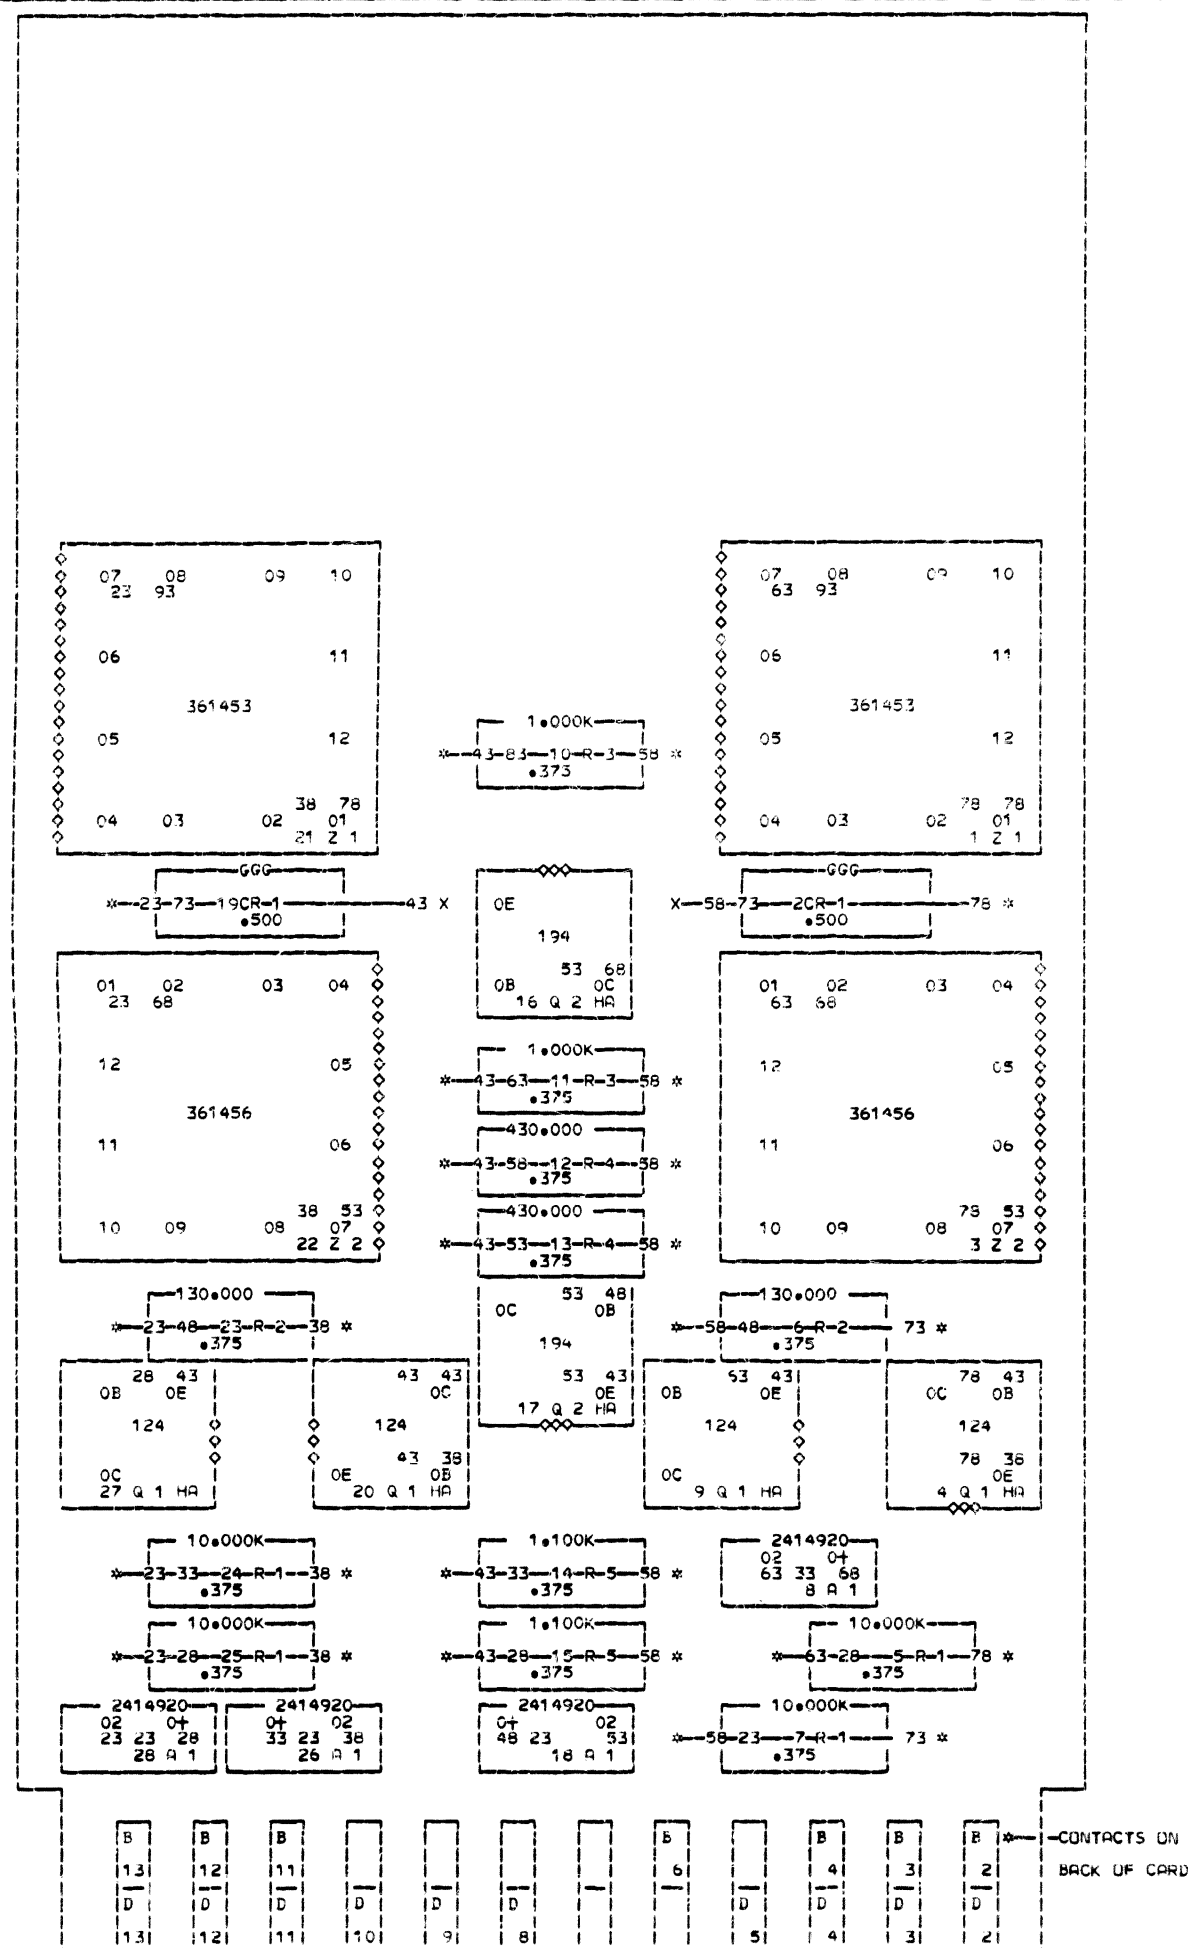

INTERNATIONAL BUSINESS MACHINES CORP.				
DATE		CARD	ASH-2-CDC TO SGT GATED	
RECEIVERS				
DESIGN	109-22-67	RCE	TYPE	1270
DETAIL	109-22-67	RCE	SCALE	1700E
CHECK	109-25-67	OPC	ORAL	17000 100-02-67
APPRO	109-22-67	BHS	L.C.M.	5801003 PLATINATED