
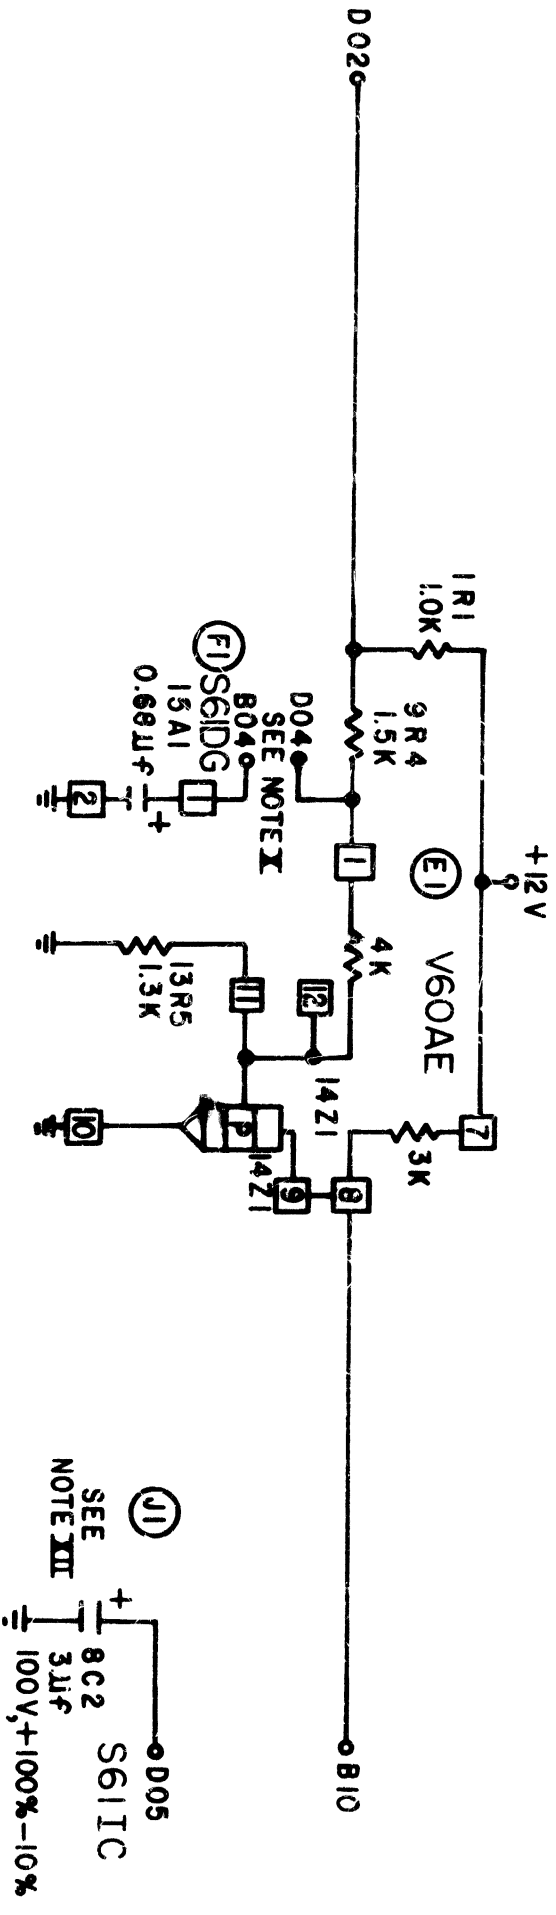
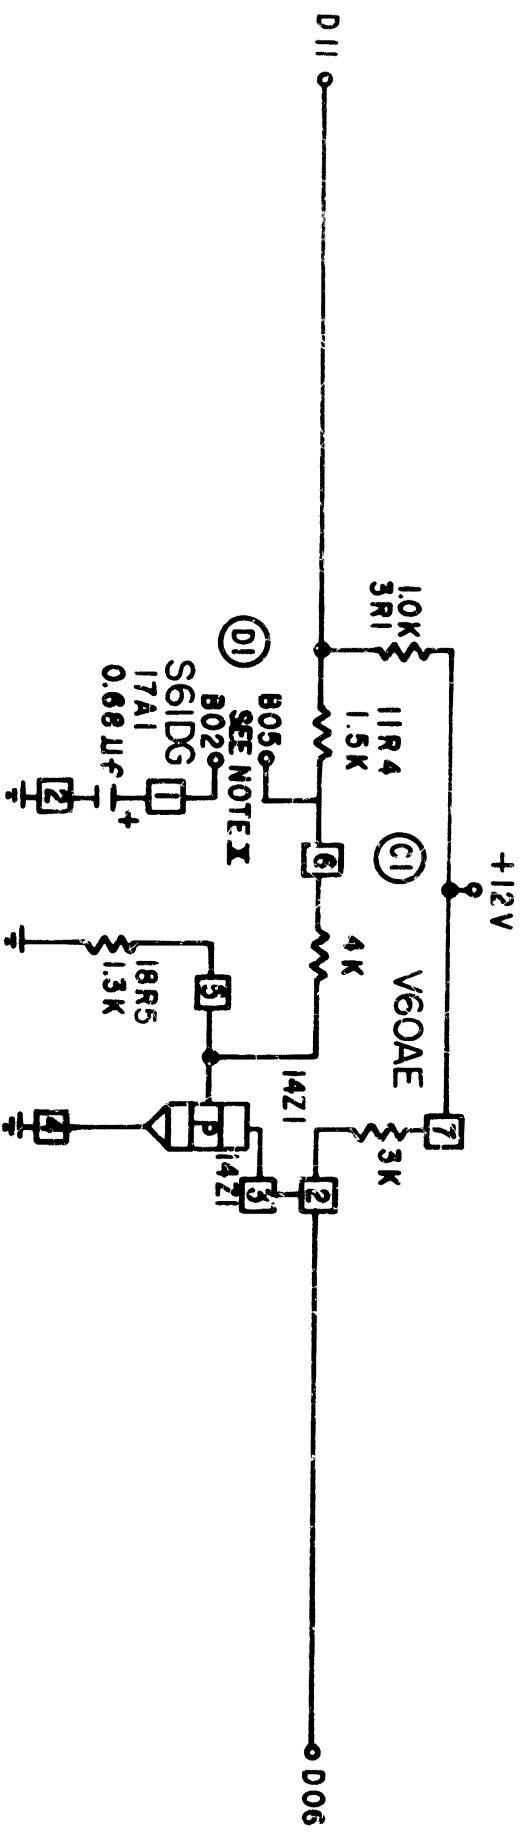



RESTRICTED

RESTRICTED

SHEET 3 OF 3

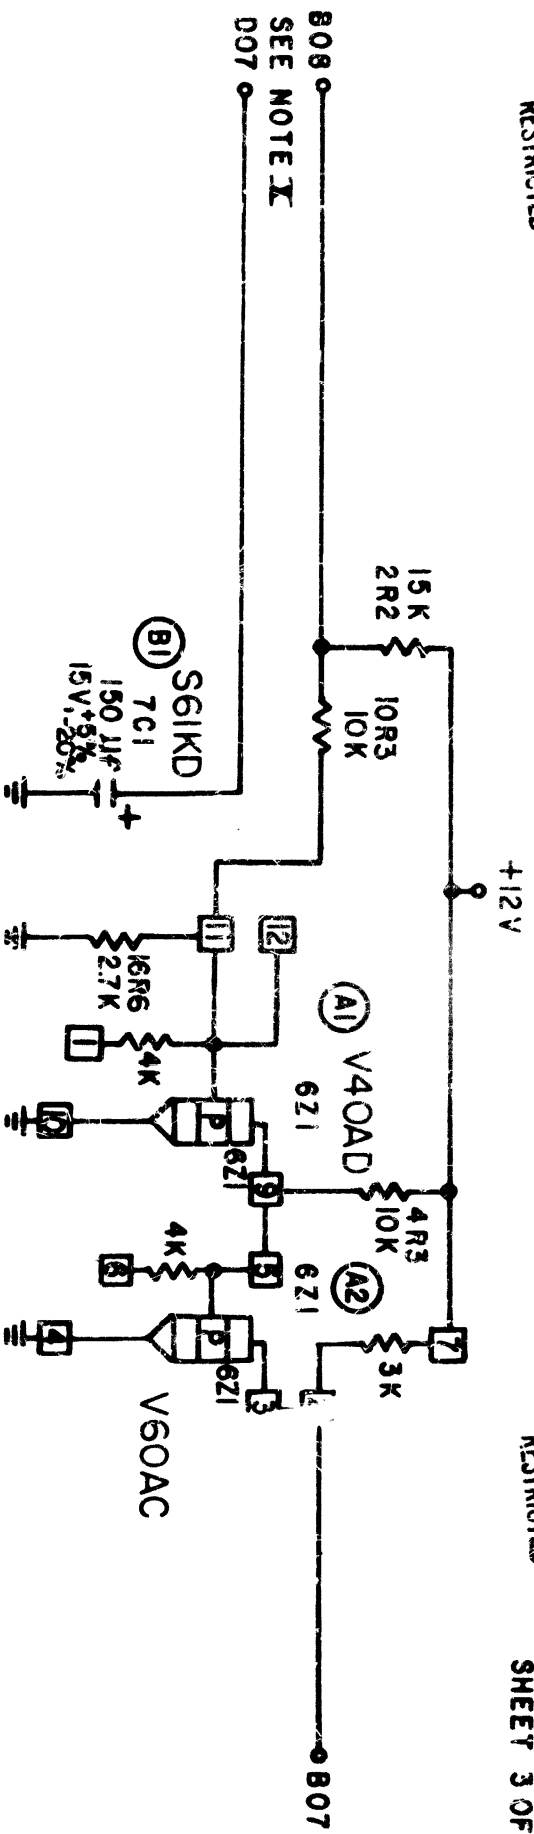

UNUSED COMPONENTS

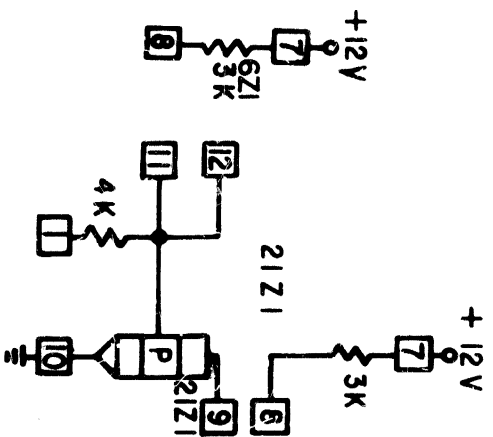

NOTES

- X** THESE PINS MUST BE CONNECTED FOR PROPER CIRCUIT OPERATION B02 TO B05, D07 TO B08, D04 TO B04, D13 TO B13
- XI** ALL DISCRETE RESISTORS ARE 1/4W, 5% UNLESS OTHERWISE NOTED
- XII** 8C2 IS +48V DECOUPLING CAPACITOR

III 8C2 IS +48V DECOUPLING CAPACITOR

III 8C2 IS +48V DECOUPLING CAPACITOR

CIRCUIT AND PACKAGING STANDARD	
APPROVAL	DATE

APPROVAL

DATE _____

NO VOLTAGE PIN BUSSING CONDITION

INTERNATIONAL BUSINESS MACHINES 1997		DATE	CHANGE NO.	APPROVAL	DATE	CHANGE NO.	APPROVAL	DEVELOPMENT NO.
NAME INTEGRATOR - POR		10-4-65	164314	A				
		20DEC65	166054	B				
DESIGN	PAID 92-65 MODEL							
DETAIL	RD 92-65 SCALE							
CHECK	ON 92-65 DRAW							
APPRO	CNS 92-65 CHECK							