

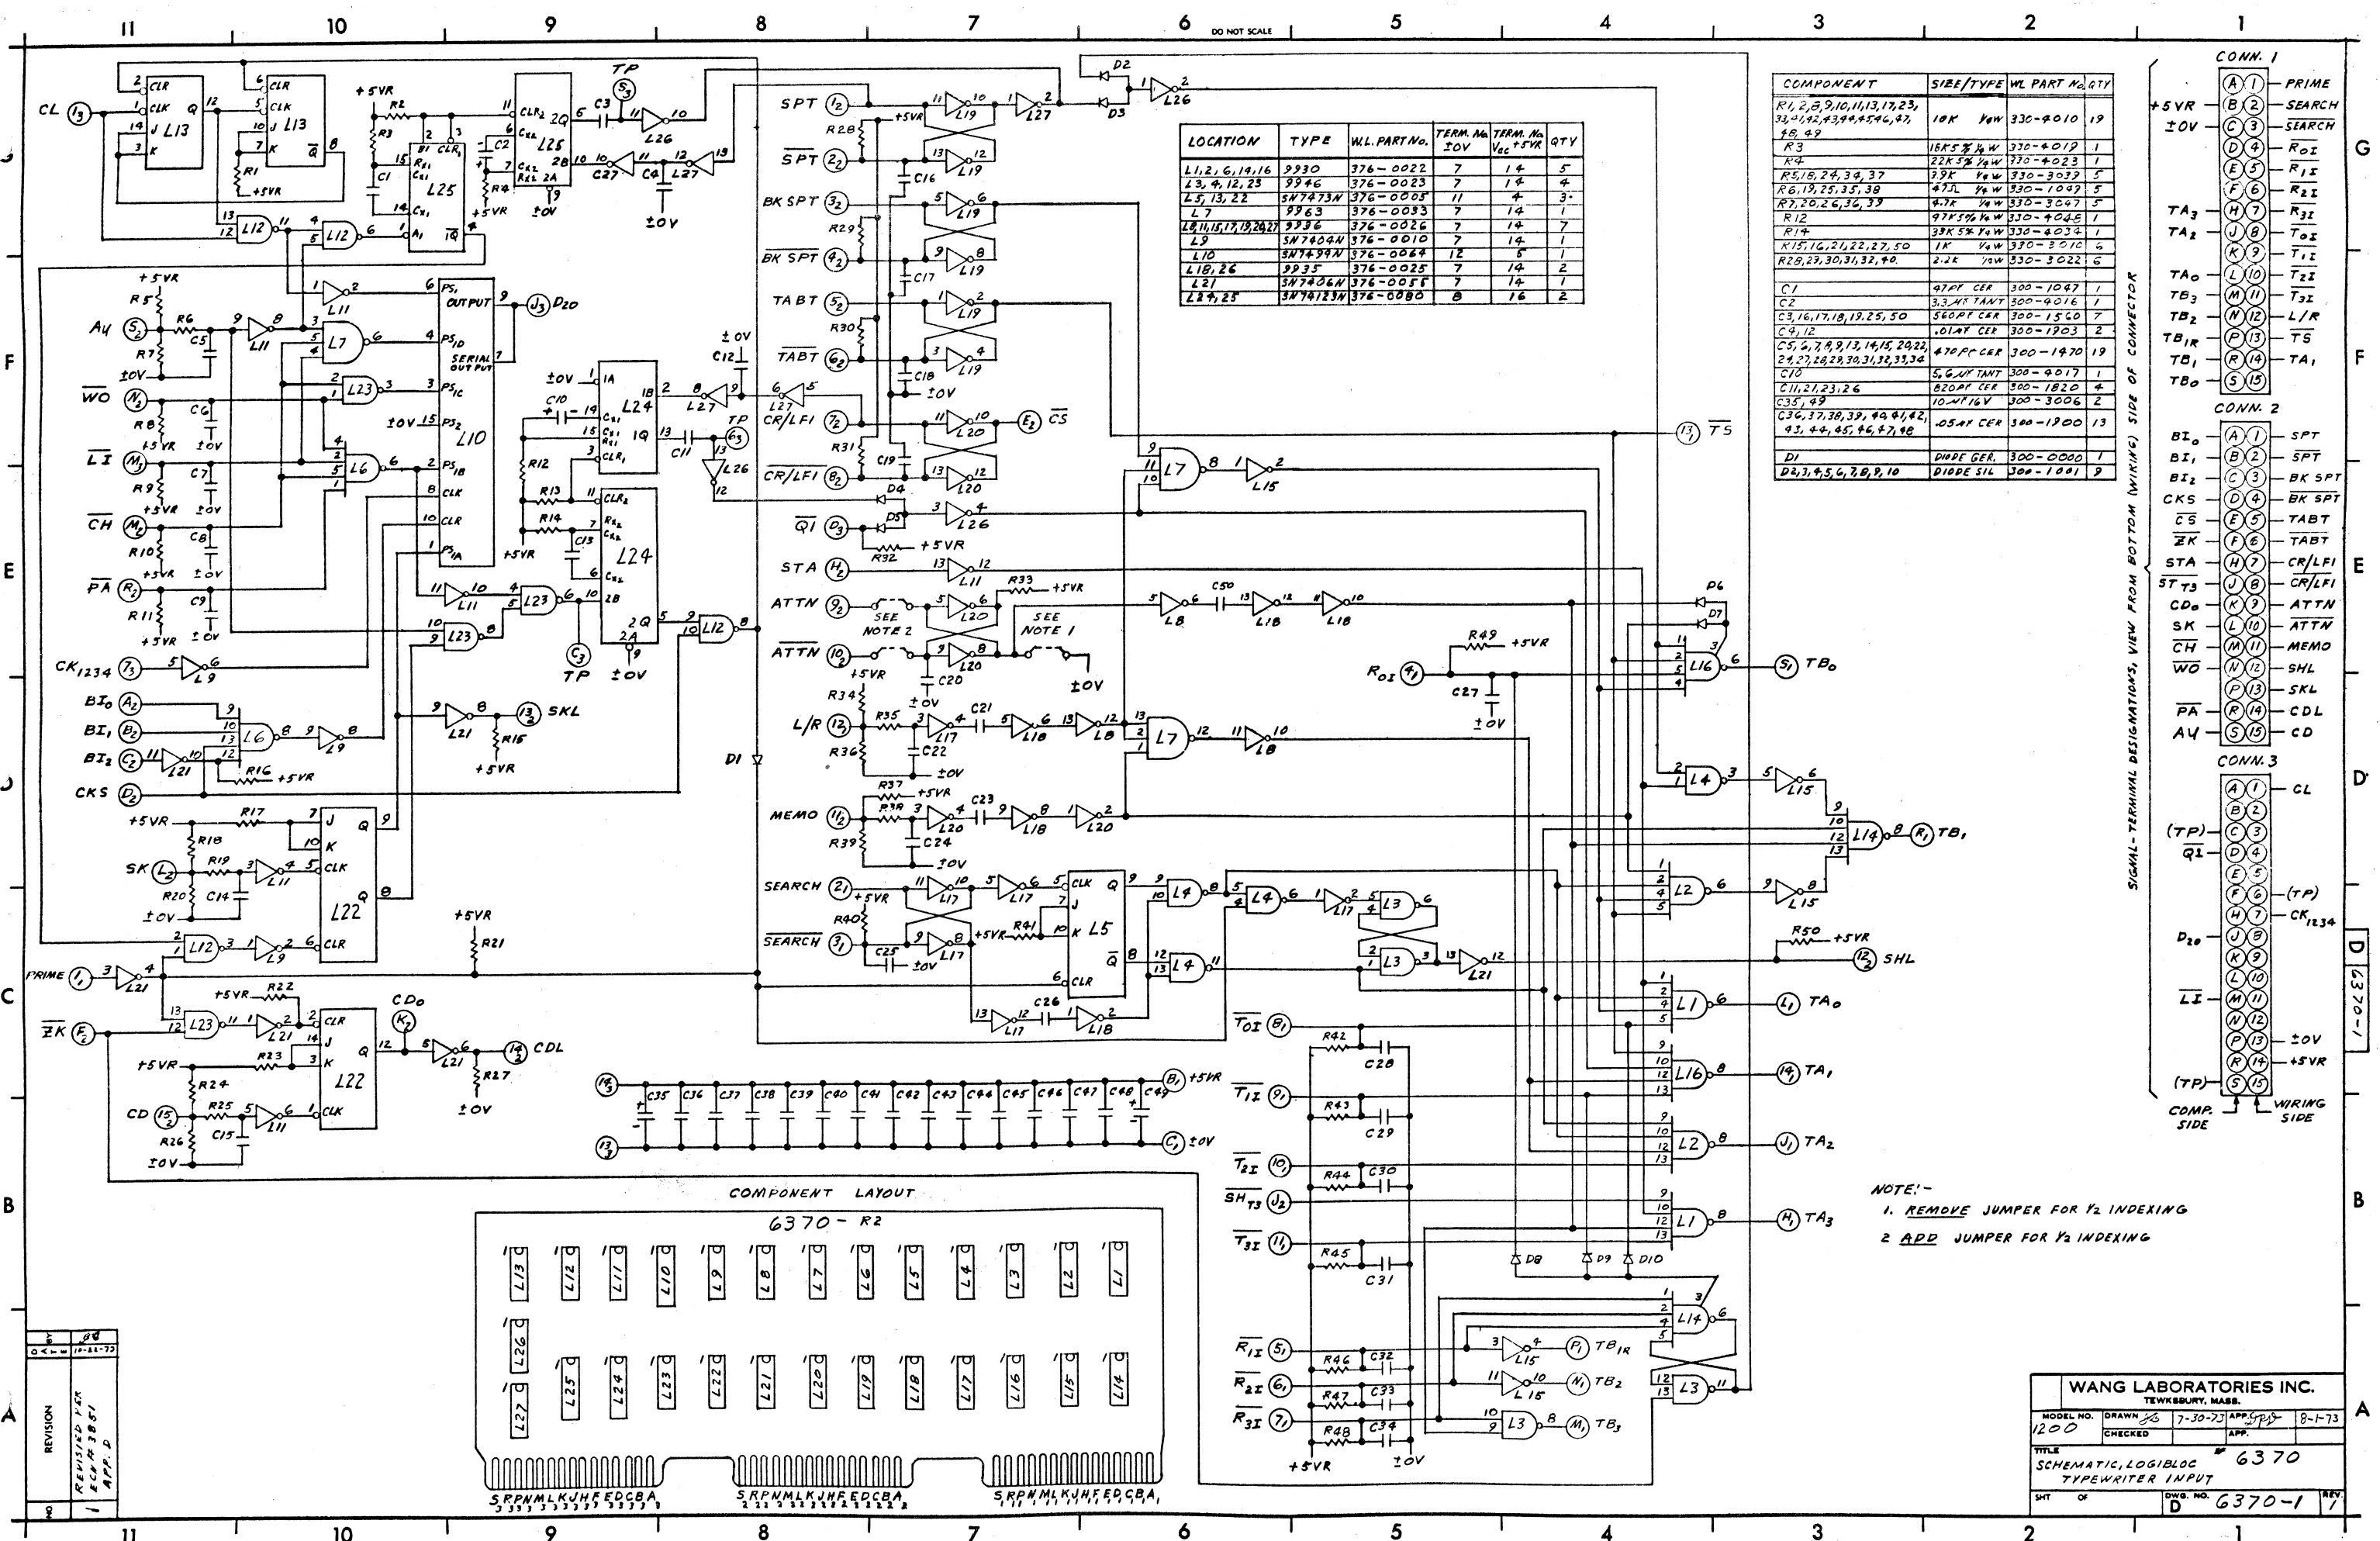


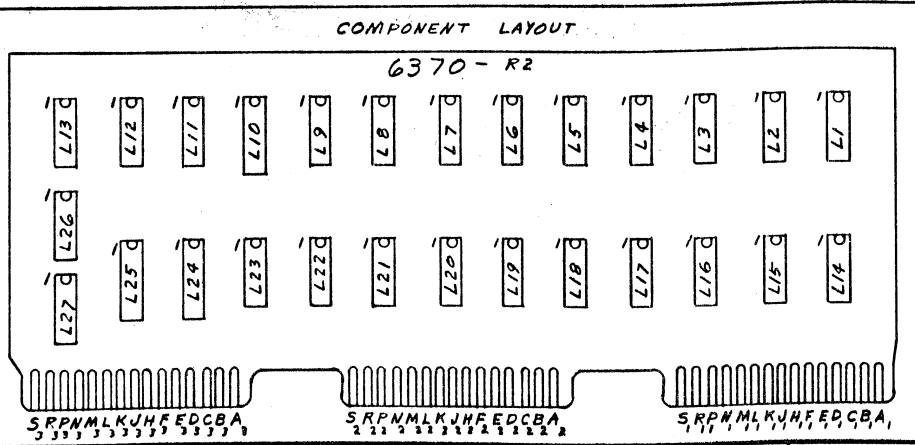

LOCATION	TYPE	WL PART NO.	TERM. NO. ±0V	TERM. NO. V _{CC} +5V	QTY
L1,2,6,14,16	9930	376-0022	7	14	5
L3,4,12,23	9946	376-0023	7	14	4
L5,13,22	SN7473N	376-0003	11	4	3
L7	9963	376-0003	7	14	1
L8,11,15,17,19,24,27	9936	376-0026	7	14	7
L9	SN7404N	376-0010	7	14	1
L10	SN7499N	376-0084	12	5	1
L18,26	9935	376-0025	7	14	2
L21	SN7406N	376-0058	7	14	1
L24,25	SN74123N	376-0080	8	16	2

COMPONENT	SIZE/TYPE	WL PART NO.	QTY
R1,2,3,9,10,11,13,17,23, 33,41,42,43,44,45,46,47, 48,49	10K 1/4W	330-4010	19
R3	16K5 1/4W	330-4019	1
R4	22K 1/4W	330-4023	1
R5,15,24,34,37	39K 1/4W	330-3039	5
R6,19,25,35,38	47K 1/4W	330-1047	5
R7,20,26,36,39	47K 1/4W	330-3047	5
R12	97K 1/4W	330-4045	1
R14	39K 5/8W	330-4034	1
R15,16,21,22,27,50	1K 1/4W	330-3010	6
R28,29,30,31,32,40	2.2K 1/4W	330-3022	6
C1	97PF CER	300-1047	1
C2	3.3µF TANT	300-4016	1
C3,16,17,18,19,25,50	560PF CER	300-1500	7
C4,12	.01µF CER	300-1903	2
C5,6,7,8,9,13,14,15,20,22, 24,27,28,29,30,31,32,33,34	470PF CER	300-1470	19
C10	5.6µF TANT	300-4017	1
C11,21,23,26	820PF CER	300-1820	4
C35,48	10µF 16V	300-3006	2
C36,37,38,39,44,46,47,48	.05µF CER	300-1900	13
D1	DIODE GER.	300-0000	1
D2,3,4,5,6,7,8,9,10	DIODE SIL	300-1041	9

SIGNAL-TERMINAL DESIGNATIONS, VIEW FROM BOTTOM (WIRING) SIDE OF CONNECTOR

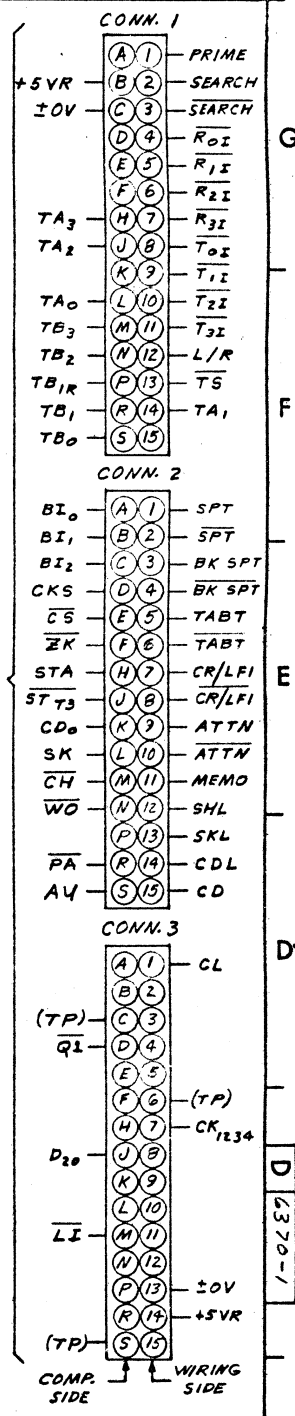

NOTE:-
1. REMOVE JUMPER FOR Y2 INDEXING
2. ADD JUMPER FOR Y2 INDEXING

REVISION	DATE	BY	APP.
1	10-21-73	REVISOR	APP. D

WANG LABORATORIES INC.			
TEWKSBURY, MASS.			
MODEL NO.	DRAWN	7-30-73	APP. PJS
1200	CHECKED		APP.
TITLE			
SCHEMATIC, LOGIBLOC 6370			
TYPEWRITER INPUT			
SHT	OF	DWG. NO.	REV.
1		D 6370-1	1