



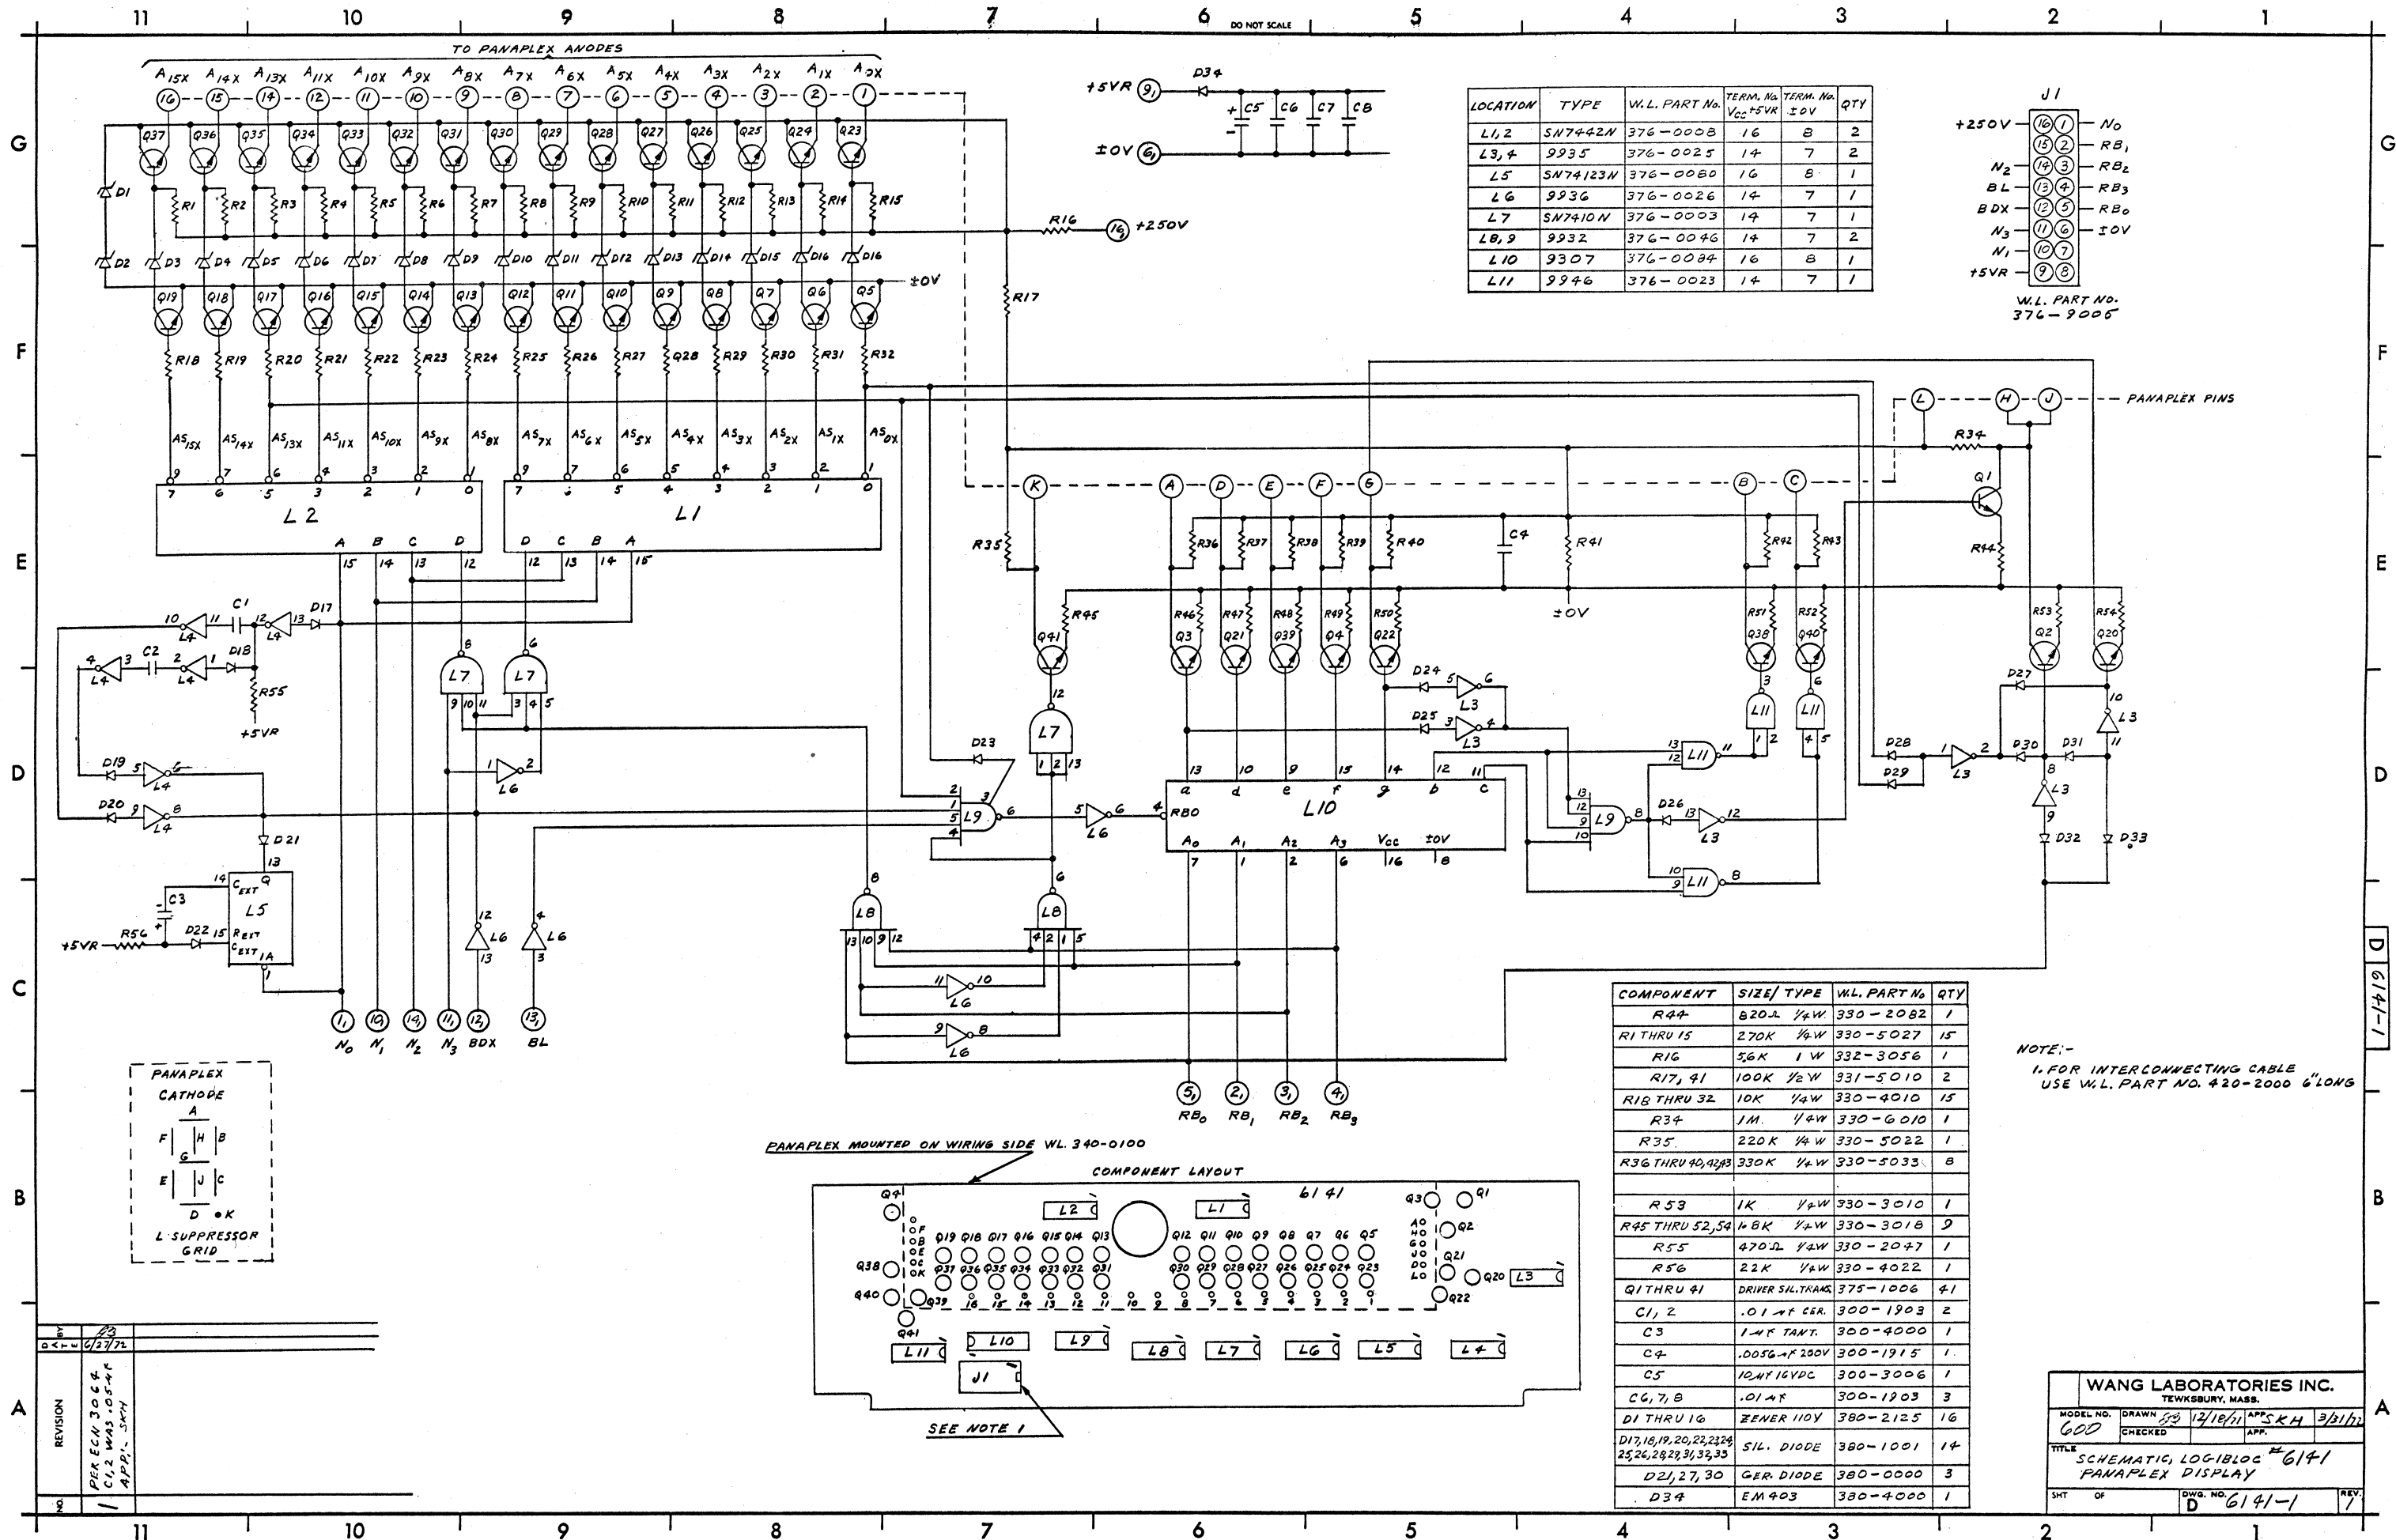

LOCATION	TYPE	W.L. PART No.	TERM. No. V _{CC} +5V	TERM. No. ±0V	QTY
L1, 2	SN7442N	376-0008	16	8	2
L3, 4	9935	376-0025	14	7	2
L5	SN74123N	376-0080	16	8	1
L6	9936	376-0026	14	7	1
L7	SN7410N	376-0003	14	7	1
L8, 9	9932	376-0046	14	7	2
L10	9307	376-0084	16	8	1
L11	9946	376-0023	14	7	1



COMPONENT	SIZE/TYPE	W.L. PART No.	QTY
R44	820Ω 1/4W	330-2082	1
R1 THRU 15	270K 1/4W	330-5027	15
R16	56K 1W	332-3056	1
R17, 41	100K 1/2W	931-5010	2
R18 THRU 32	10K 1/4W	330-4010	15
R34	1M 1/4W	330-6010	1
R35	220K 1/4W	330-5022	1
R36 THRU 40, 43	330K 1/4W	330-5033	8
R53	1K 1/4W	330-3010	1
R45 THRU 52, 54	1.8K 1/4W	330-3018	2
R55	470Ω 1/4W	330-2047	1
R56	22K 1/4W	330-4022	1
Q1 THRU 41	DRIVER SIL. TRANS.	375-1006	41
C1, 2	.01 μF CER.	300-1903	2
C3	1 μF TANT.	300-4000	1
C4	.0056 μF 200V	300-1915	1
C5	10 μF 16VDC	300-3006	1
C6, 7, 8	.01 μF	300-1903	3
D1 THRU 16	ZENER 110V	380-2125	16
D17, 18, 19, 20, 22, 23, 25, 26, 28, 29, 31, 32, 33	SIL. DIODE	380-1001	14
D21, 27, 30	GER. DIODE	380-0000	3
D34	EM 403	380-4000	1

NOTE:-
1. FOR INTERCONNECTING CABLE
USE W.L. PART NO. 420-2000 6" LONG

WANG LABORATORIES INC.			
TEWKSBURY, MASS.			
MODEL NO.	DRAWN	DATE	APP.
600	52	12/18/51	SKH
CHECKED	APP.		
TITLE			
SCHEMATIC, LOG-IBLOC #6141			
PANAPLEX DISPLAY			
SHT	OF	DWG. NO.	REV.
1		D 6141-1	7