



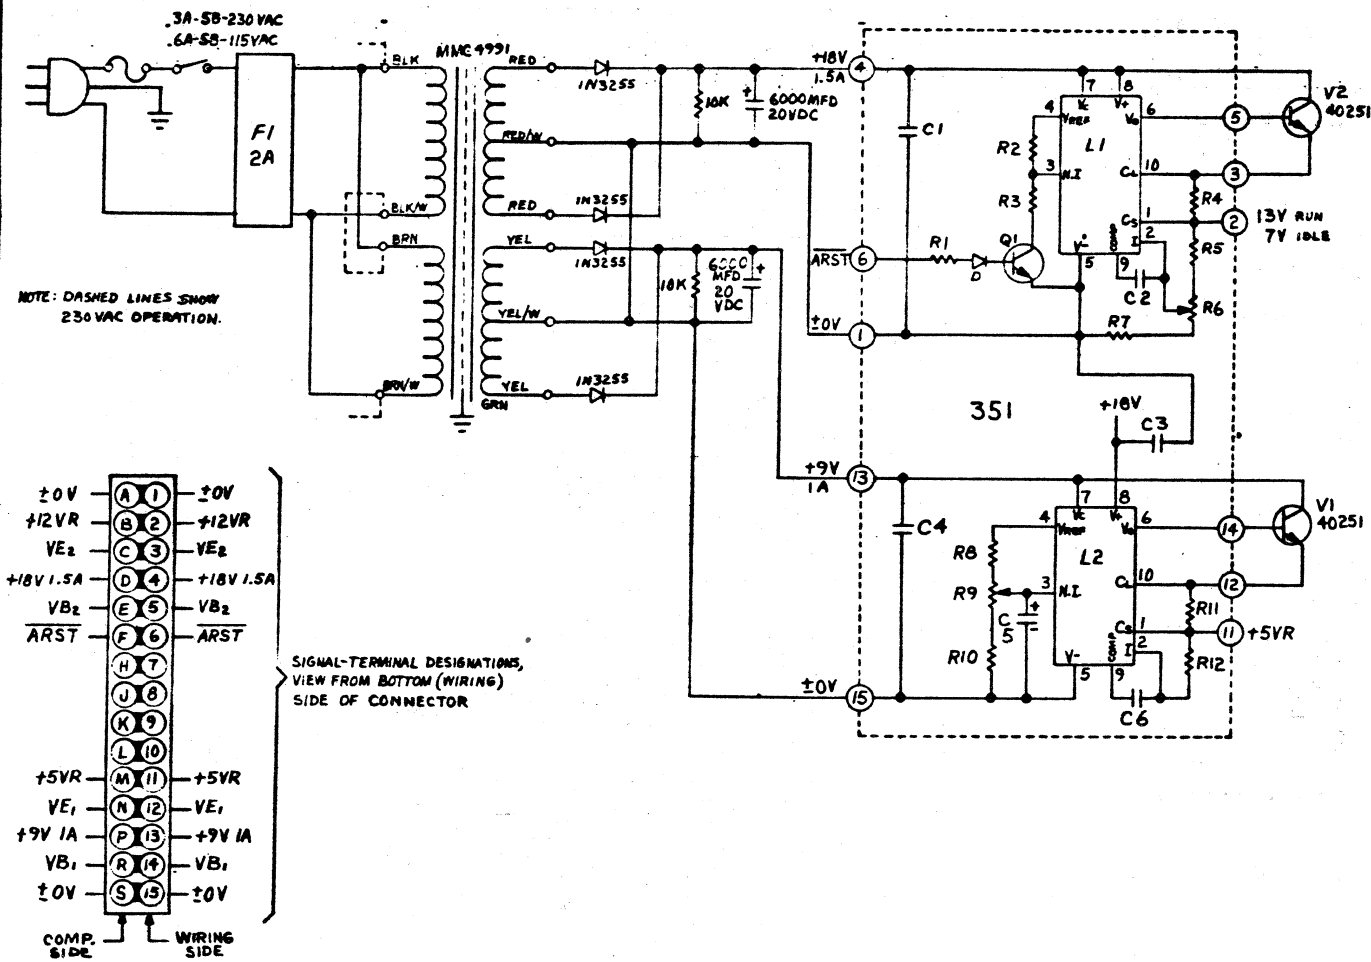

NOTE: DASHED LINES SHOW
230 VAC OPERATION.

SIGNAL-TERMINAL DESIGNATIONS,
VIEW FROM BOTTOM (WIRING)
SIDE OF CONNECTOR

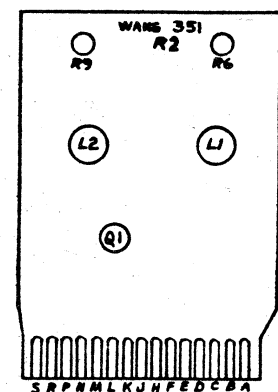

COMPONENT	SIZE/TYPE	W.L. PART NO.	QTY.
R1	10K 1/4W	330-4010	1
R2,3,5	1K 1/4W	330-3010	3
R4,11	.3Ω 1.5W	333-0044	2
R6,9	1K TRIM POT	336-1001	2
R7	100Ω 1/4W	330-2010	1
R8,12	1.5K 1/4W	330-3015	2
R10	4.7K 1/4W	330-3047	1
C1,3	.047μF MYLAR	300-2348	2
C2,6	220pF CER.	300-1220	2
C4	.05μF CER.	300-1900	1
C5	1μF TANT.	300-4000	1
Q1	MP5 6512	375-1012	1
D	SIL. DIODE (0039)	380-1001	1
L1,2	723 I.C.	376-0066	2

REV	BY	DATE	DESCRIPTION
1	W.S.	10-26-73	REVISED PER 10-26-73
2	W.S.	11-15-73	REVISED PER 11-15-73
3	W.S.	12-10-73	REVISED PER 12-10-73

DEC 07 1978

WANG LABORATORIES, INC.
TEWKSBURY, MASS. U. S. A.

MODEL No. 2203 W.O. No. SCALE SHEET 1 OF 1

TITLE SCHEMATIC LOGIBLOC #351 PROGRAMABLE POWER SUPPLY

210-0351 4 C 6467

PART NUMBER REV SIZE DRAWING NUMBER