

EXTENDED MEMORY AREA ON-LINE DIAGNOSTIC

reference manual



HEWLETT-PACKARD COMPANY
11000 WOLFE ROAD, CUPERTINO, CALIFORNIA, 95014

LIST OF EFFECTIVE PAGES

Changed pages are identified by a change number adjacent to the page number. Changed information is indicated by a vertical line in the outer margin of the page. Original pages do not include a change number and are indicated as change number 0 on this page. Insert latest changed pages and destroy superseded pages.

All pages contained in this manual are original issue.

NOTICE

The information contained in this document is subject to change without notice.

HEWLETT-PACKARD MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Hewlett-Packard shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

Hewlett-Packard assumes no responsibility for the use or reliability of its software on equipment that is not furnished by Hewlett-Packard.

This document contains proprietary information which is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced or translated to another program language without the prior written consent of Hewlett-Packard Company.

Copyright © 1978 by HEWLETT-PACKARD COMPANY

Library Index Number
92067.070.92067-90007

CONTENTS

| Section I | Page | Section III | Page |
|---|------|--------------------------------|------|
| INTRODUCTION | | OPERATING PROCEDURE | |
| General | 1-1 | Loading the Diagnostic | 3-1 |
| Required Hardware | 1-1 | Operating the Diagnostic | 3-1 |
| Required Software and Documentation | 1-1 | | |
| Section II | Page | Section IV | Page |
| PROGRAM ORGANIZATION | | DIAGNOSTIC PERFORMANCE | |
| Organization | 2-1 | Message Examples | 4-1 |
| Message Reporting | 2-1 | Service Information | 4-3 |
| Test Descriptions | 2-1 | | |
| Diagnostic Limitations | 2-3 | | |

ILLUSTRATIONS

| Title | Page | Title | Page |
|--------------------------------|------|---------------------------------|------|
| EMA Diagnostic Flowchart | 3-3 | Troubleshooting Flowchart | 4-3 |

TABLES

| Title | Page |
|-------------------------|------|
| Test Descriptions | 2-2 |

INTRODUCTION

SECTION

I

1-1. GENERAL

The on-line diagnostic program confirms the proper operation of the RTE-IV Extended Memory Area (EMA) firmware on an HP 1000 E-Series or F-Series Computer. It operates under the control of the RTE-IV Operating System. For further information on the RTE-IV EMA routines, see the Memory Management Section of the RTE-IV Programmer's Reference Manual.

1-2. REQUIRED HARDWARE

The same hardware is required as for a minimum RTE-IV system plus the EMA firmware. The required hardware includes:

- a. HP 1000 E-Series or F-Series Computer with at least 96K bytes of memory;
- b. Dynamic Mapping System including Memory Protect;
- c. Time Base Generator;
- d. Dual Channel Port Controller (DCPC);
- e. High speed disc storage;
- f. System console device; and
- g. Firmware Accessory Board (FAB) with EMA firmware installed.

Note that although the diagnostic will function in the above system, it will not be able to do a complete check. The diagnostic requires a 38 page partition for a complete check, which is not possible in a 96K byte system.

1-3. REQUIRED SOFTWARE AND DOCUMENTATION

The required software and documentation consists of an RTE-IV Operating System which includes the following items:

- a. A relocatable file: %#EMA, part no. 92067-16013; and
- b. The following documentation:
 1. RTE-IV Programmer's Reference Manual 92067-90001;
 2. RTE-IV On-Line Generator Reference Manual 92067-90002;
 3. RTE-IV Assembler Reference Manual 92067-90003;
 4. EMA On-Line Diagnostic Reference Manual 92067-90007; and
 5. EMA Firmware Installation Manual 92067-90006.

PROGRAM ORGANIZATION

SECTION

II

2-1. ORGANIZATION

This on-line diagnostic consists of an Initiation Section and 32 tests. The Initiation Section accepts the Logical Unit of the output device and determines the amount of memory available for the EMA (Extended Memory Area). The 32 tests are described in Table 2-1.

2-2. MESSAGE REPORTING

Three types of messages are displayed: error and information messages from the EMA diagnostic and messages from the RTE-IV System. Error messages are issued to inform the operator if the EMA firmware routines have failed to properly execute a function. Information messages are used to inform the operator of any special occurrences. Both of these types of messages can be sent to any output device in the RTE-IV System. The System error messages may be generated from the EMA firmware, DMS, or other hardware errors and sent to the System Console (LU 1). Some examples of the three types of messages are given in Section IV of this manual.

2-3. TEST DESCRIPTIONS

The 32 tests which the diagnostic performs exercise nearly every branch in the EMA firmware. The only branches not exercised are those that respond to interrupts, approximately 2% of the firmware.

The 32 tests make calls to the EMA routines called MMAP, .EMAP, and .EMIO. The calls are designed to flow through each path of the firmware. The results returned are checked to verify proper operation. A detailed list of the tests is provided in Table 2-1.

The operator should be aware that problems in hardware other than the EMA firmware could cause the diagnostic to report errors. For example, problems in the Dynamic Mapping System could cause .EMAP errors to be reported.

Table 2-1. Test Descriptions

| TEST NUMBER | DESCRIPTION |
|-------------|--|
| Test 0 | Call MMAP with negative offset |
| Test 1 | Call MMAP with negative number of pages |
| Test 2 | Call MMAP and ask for more pages than in MSEG |
| Test 3 | Call MMAP and ask for pages beyond EMA |
| Test 4 | Call MMAP and ask for zero offset and a MSEG number of pages. |
| Test 5 | Call MMAP and ask for one page beyond the end of EMA to check read/write protect bits |
| Test 6 | Call .EMAP to access a non-EMA array from an EMA program |
| Test 7 | Call .EMAP on a zero dimensioned array |
| Test 8 | Call .EMAP with a negative number of dimensions |
| Test 9 | Call .EMAP with subscript below lower bound |
| Test 10 | Call .EMAP with negative dimension size |
| Test 11 | Call .EMAP with offset too large |
| Test 12 | Call .EMAP and ask for element 2,000,001 |
| Test 13 | Call .EMAP and cause double precision integer calculation overflow |
| Test 14 | Call .EMAP with displacement too large |
| Test 15 | Call .EMAP with a 2-dimensional EMA array, no errors |
| Test 16 | Call .EMAP with negative dimensions, non-EMA array calculations |
| Test 17 | Call .EMAP with subscript below lower bound, non-EMA array calculations |
| Test 18 | Call .EMAP with dimension size negative, non-EMA array calculations |
| Test 19 | Call .EMAP and force 15 bit overflow in non-EMA array calculations |
| Test 20 | Call .EMAP and force 16 bit overflow in non-EMA array calculations |
| Test 21 | Call .EMAP for a 2-dimensional array, no errors |
| Test 22 | Call .EMAP and cause single precision integer overflow, non-EMA array calculations |
| Test 23 | Call .EMIO and give negative buffer length |
| Test 24 | Call .EMIO with a buffer length that overflows the end of EMA |
| Test 25 | Call .EMIO with a buffer one page greater than an MSEG |
| Test 26 | Call .EMIO with a buffer in a standard MSEG |
| Test 27 | Call .EMIO with a buffer that forces a non-standard MSEG |
| Test 28 | Call .EMAP from a non-EMA program. This is done by going privileged and clearing the ID extension address. |
| Test 29 | Call MMAP from non-EMA program as in test 28 |
| Test 30 | Call .EMIO from non-EMA program as in test 28 |
| Test 31 | Call MMAP to map in a standard MSEG, then request the last element with .EMAP to check the setting of the non-standard MSEG bit and the read/write protection of the second MSEG page. This test is not performed if EMA software is being used. |

2-4. DIAGNOSTIC LIMITATIONS

The diagnostic will only be able to access memory in the partition in which it is running. If this is too small (less than 38 pages) for a complete check, the operator is informed. In this case, the diagnostic will still run, but the double precision address calculations will not occur (tests #24 and #31). The diagnostic will not run at all in a partition which does not provide an EMA (Extended Memory Area) size which is one page larger than the maximum addressable space (32K words – the size of the operating system), unless the Size Command (SZ) is used to reduce the size of the MSEG (Mapping Segment) and the EMA.

Because of restrictions imposed by the RTE-IV system, the diagnostic is not able to test for proper interrupt operation. This is about two percent of the firmware.

It should be noted that the diagnostic locks itself into memory making it unswappable while it is running its tests. It does unlock itself for a short time at the completion of each pass through the tests to allow swapping.

OPERATING PROCEDURE

SECTION

III

3-1. LOADING THE DIAGNOSTIC

The following assumes that an RTE-IV Operating System is up and running and that the proper entry points for the EMA firmware were specified during generation (refer to the RTE-IV On-Line Generator Reference Manual). The shaded characters represent the print-out from the system and the **bold** characters represent the operator's input to the system. Figure 3-1 is a flowchart for using the EMA diagnostic.

The diagnostic is supplied as a relocatable file which can be initially loaded using the RTE-IV LOADR which is described in the RTE-IV Programmer's Reference Manual. The procedure is as follows:

```
*RU,LOADR,,%#EMA,1,NL
```

This will load #EMA as a type 3 program. It is possible to save this program so that it need not be loaded again on this system by giving the FMGR command SP,#EMA.

Following is an example:

```
*RU,FMGR
:RU,LOADR,,%#EMA,1,NL
:SP,#EMA
:
```

This example, with a "no list" the output option, was performed on the System Console but the diagnostic can be loaded from any terminal in the system.

3-2. OPERATING THE DIAGNOSTIC

Once the diagnostic has been loaded, it can be executed from the FMGR, the RTE-IV System, or any multi-terminal monitor console.

```
*RU,#EMA [,lu [,#times]]
```

Where lu is the output device upon which messages will be written and #times is the number of times the diagnostic will run. If lu is zero or unspecified, it is defaulted to the System Console (LU 1). If #times is not given, the diagnostic is run once. If #times is negative, the program runs continuously until the break flag is set (see below). The following are some examples:

```
*RU,#EMA,6
```

Run the diagnostic once and print any messages on LU 6.

Operating Procedure

***RU,#EMA,21,10**

Run the diagnostic ten times and print any messages on LU 21.

***RU,#EMA,1,-1**

Run the diagnostic continuously and print messages on the System Console.

To terminate the diagnostic at the end of the next set of tests the operator can set the break flag. This is done by entering as a system command:

***BR,#EMA**

During execution, the octal test number is displayed in the S register.

CAUTION


Because of the possibility of the EMA firmware not working properly and overwriting the operating system, it is not wise to have other critical operations occurring concurrently. For example, the first time the diagnostic is run after the firmware is installed, the system should obviously not be performing any critical tasks.

NOTE

It is possible to execute the diagnostic in a partition which would normally be too small for the diagnostic to run at all. This may be required for RTE-IV systems containing a minimum amount of memory. This is accomplished by using the RTE-IV Size Command (SZ) to reduce the size of the EMA and the MSEG. For example:

***SZ,#EMA,3,2**

This will allow #EMA to run in a 10 page partition (7 pages for the program and 3 pages for the EMA).

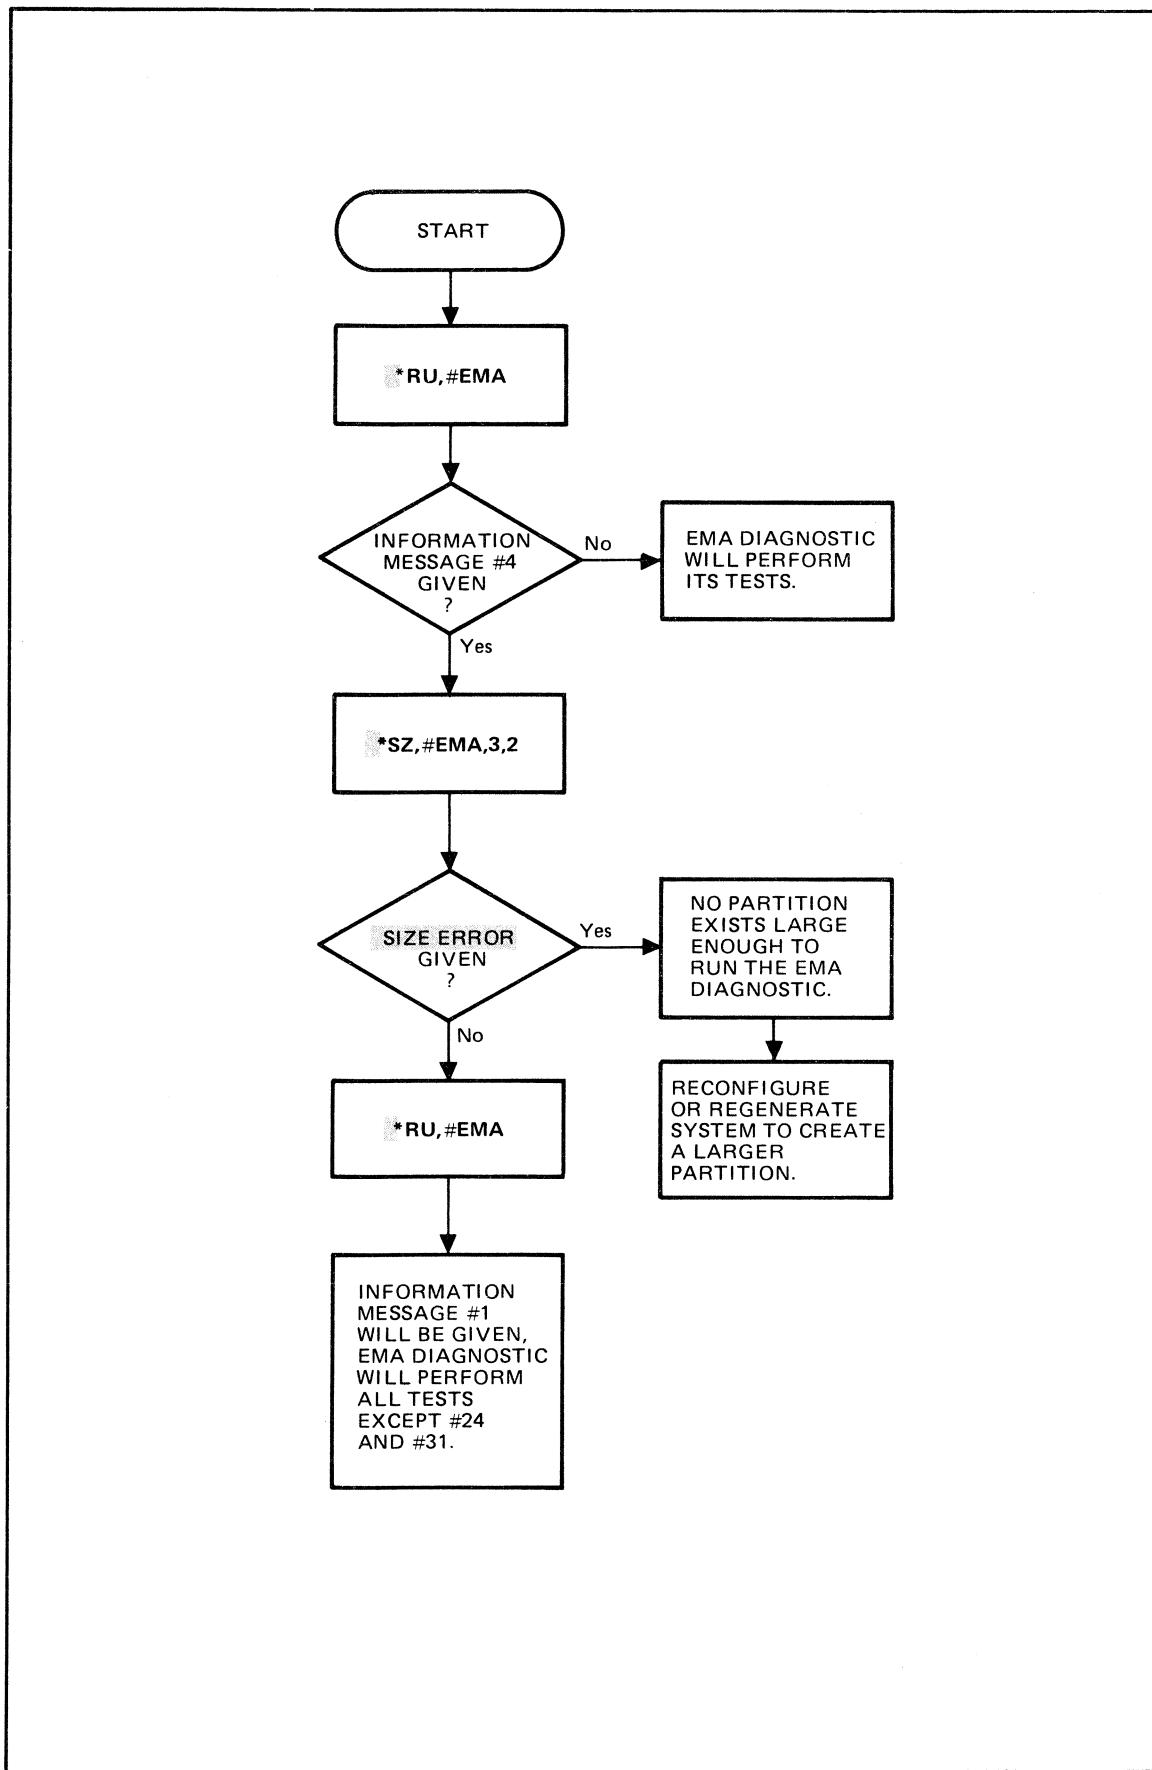

7700-184

Figure 3-1. EMA Diagnostic Flowchart

DIAGNOSTIC PERFORMANCE

SECTION

IV

4-1. MESSAGES EXAMPLES

Three types of messages are displayed: error and information messages from the EMA diagnostic and messages from the RTE-IV System. Error messages are issued to inform the operator if the EMA firmware routines have failed to properly execute a function. Information messages are used to inform the operator of any special occurrences. These messages can be sent to any output device on the RTE-IV System. The System error messages may be generated by the EMA firmware, DMS, or other hardware errors and sent to the System Console (LU 1).

Some examples of the three types of messages are listed in the following paragraphs. The **shaded** characters represent the printout from the system and the **bold** characters represent the operator's input to the system.

a. ERROR MESSAGES FROM THE EMA DIAGNOSTIC.

The general form of the error messages is:

TESTzz:

Followed by one of the following:

name DID NOT DETECT ERROR CONDITION A=xxxxxxB B=xxxxxxB

name INCORRECT ERROR RETURN A=xxxxxxB B=xxxxxxB

MMAP ERROR. FIRST MAP REGISTER TO MISCOMPARE = xx, CONTENTS = xxxx

EMAP ERROR. EXPECTED B = yyyyyyB ACTUAL B = xxxxxxB

EMAP MAPPING ERROR

MAP REG nn = mmmmm

MAP REG jj = kkkkk

EMIO ERROR. EXPECTED B = yyyyyyB ACTUAL B = xxxxxxB

ID EXT. WORD ZERO WRONG. EXPECTED = yyyyyyB ACTUAL = xxxxxxB

Where zz is the test number and name is the name of the failing micro-routine (either MMAP, .EMAP, or .EMIO). The letters A and B refer to the A and B registers. The register contents are provided primarily for an in depth analysis of the EMA firmware and will not, in general, be of use to the average user.

b. INFORMATION MESSAGES FROM THE EMA DIAGNOSTIC.

The information messages are as follows:

1. The following message is issued if the partition in which the diagnostic is running is too small for a complete test. The partition must be 38 pages or more to exercise the double precision calculations (tests #24 and #31).

WARNING — PARTITION TOO SMALL FOR COMPLETE TEST.

2. The following message is issued at the end of the tests, if all the tests were successful.

EMA ON-LINE DIAGNOSTIC SUCCESSFUL COMPLETION.

3. The following message is issued at the end of the tests if any errors were discovered.

***** EMA FIRMWARE FAILED TO PASS DIAGNOSTIC *****

4. The following message is issued if the partition in which the diagnostic is executing is too small (see On-Line Diagnostic Limitations in Section II of this manual).

***** THIS PARTITION IS TOO SMALL TO EXECUTE THE ON-LINE DIAGNOSTIC**

***** EMA ON-LINE DIAGNOSTIC TERMINATED**

5. The following message is issued if the diagnostic was loaded with the EMA software routines.

WARNING — EMA DIAGNOSTIC USING SOFTWARE INSTEAD OF FIRMWARE

The software version will be used if the proper RP commands to use the firmware were not included at system generation. In this case, the firmware routines can be accessed by loading a file which causes the LOADR to use the firmware opcodes when loading the diagnostic (see the RPL psuedo-instruction in the Assembler Reference Manual).

c. MESSAGES FROM THE RTE-IV SYSTEM.

It is possible that certain errors will cause RTE-IV to abort the diagnostic and issue error messages to the System Console (LU 1). For example:

MP INST iiiiii
ABE = aaaaaa bbbbbbb e
XYO = xxxxxxxx yyyyyyy o
MP #EMA ddddddd


Where ii is the instruction itself, ABE XYO gives the contents of specified registers, and dddd is the address of the offending instruction. This could be caused by a problem in the EMA firmware, the Dynamic Mapping System, or the Memory Protect board, among others (see the RTE-IV Programmer's Reference Manual).

```
DM VIOL = vvvvvv
DM INST = iiini
ABE = aaaaaa bbbbbbb e
XYO = xxxxxx yyyy o
DM #EMA dddddd
```

Where vvvvvv is the contents of the DMS violation register, iiini is the offending instruction, ABE XYO gives the contents of the specified registers, and dddddd is the address of the offending instruction. This could be caused by a problem in the EMA or DMS, among others (see the RTE-IV Programmer's Reference Manual).

4-2. SERVICE INFORMATION

Figure 4-1 is a troubleshooting flowchart to follow if errors occur while running the EMA On-Line Diagnostic. Because the EMA firmware uses many other features of the machine, it is possible that the diagnostic will fail even if the firmware is good. Errors could be caused by the EMA firmware, DMS, Memory Protect, or other failing hardware components. Running the appropriate diagnostics will further isolate the problem. If the problem cannot be isolated by following the troubleshooting flowchart, notify the nearest Hewlett-Packard Sales and Service Office.

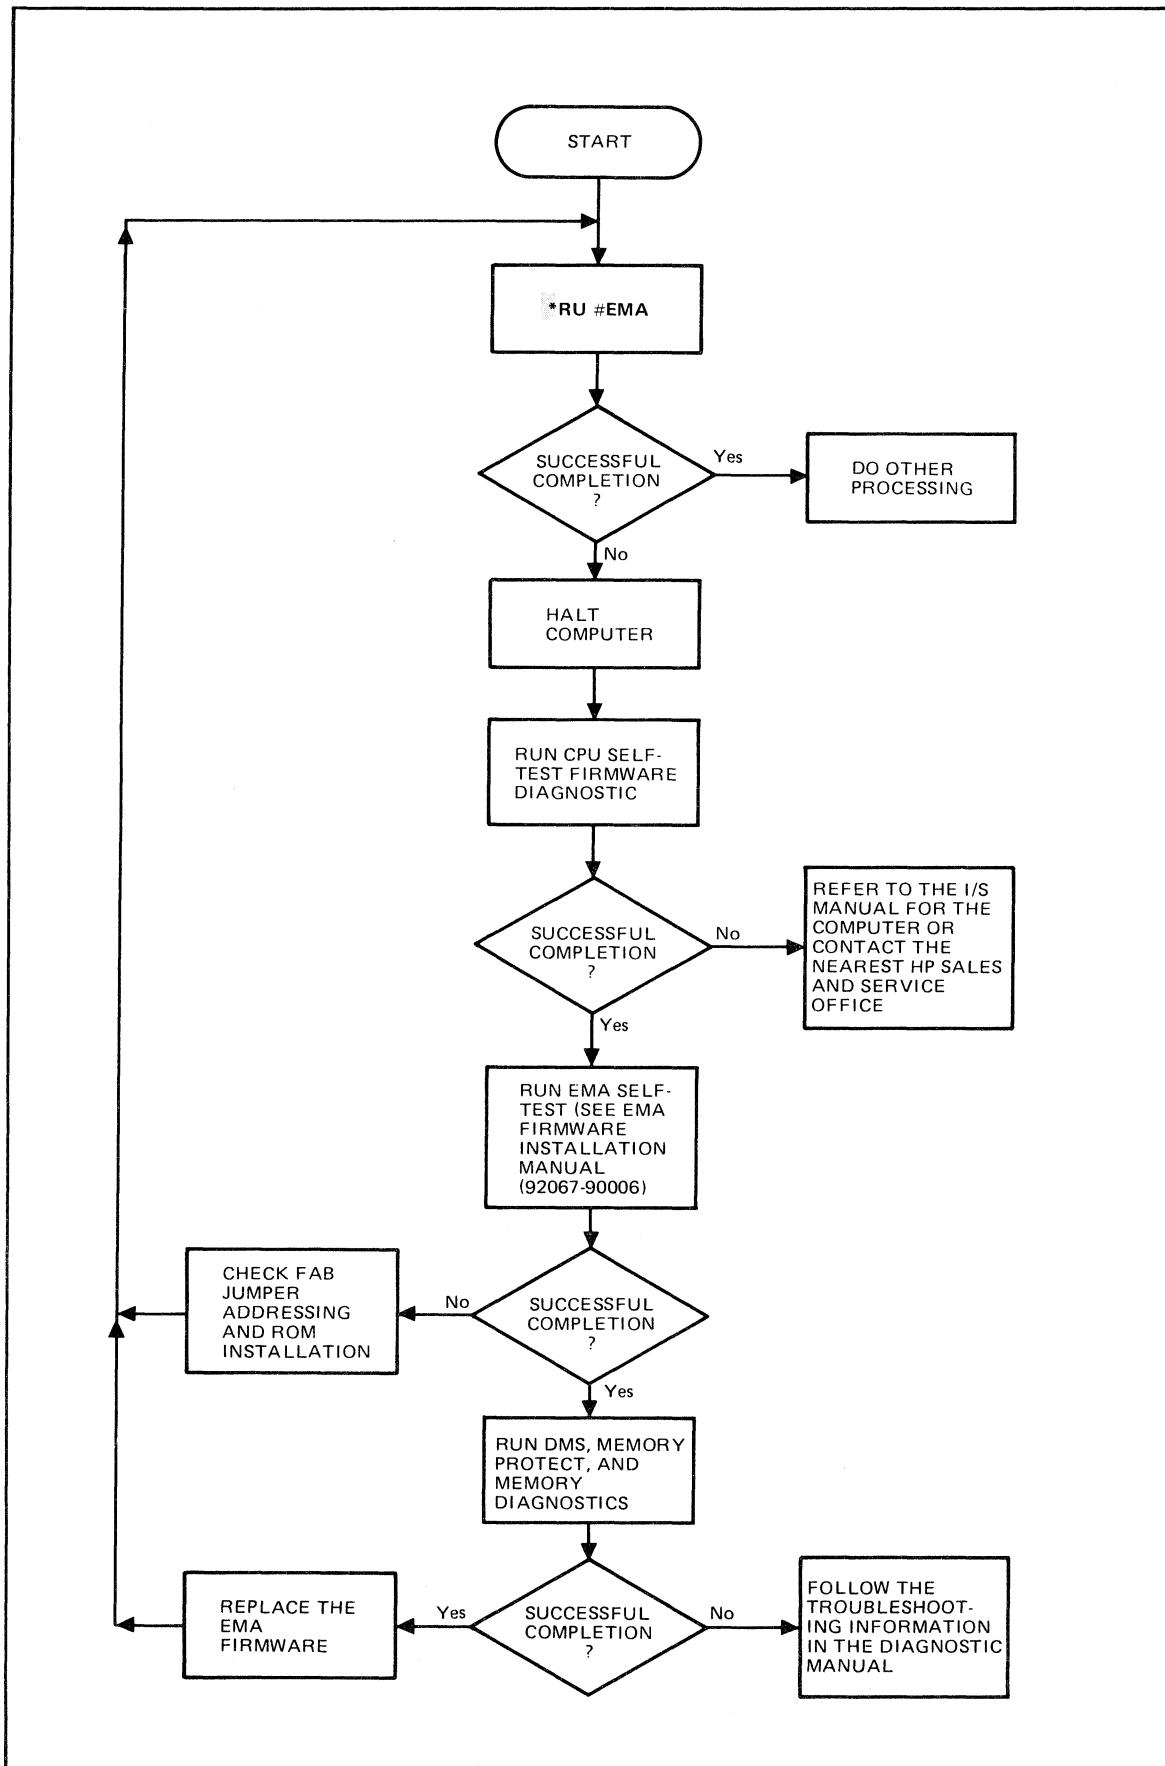

7700-183

Figure 4-1. Troubleshooting Flowchart



HEWLETT-PACKARD COMPANY
11000 WOLFE ROAD, CUPERTINO, CALIFORNIA, 95014