


REV	BY	DATE	REVISIONS
2	F.S.S.	8 27 73	REVISED & REDRAWN PER E.C.*3762 APP'D. SKH

ITEM	DESCRIPTION	W.L. NO.	QTY.
1	SOLDER 63-37	660-0202	A/R
2	P.C. BD. 5223	510-5223 P2	1
3	LACING, BLK.	605-1001	A/R

NOTE:
ALL CABLE WIRES ARE
30 INCHES LONG.

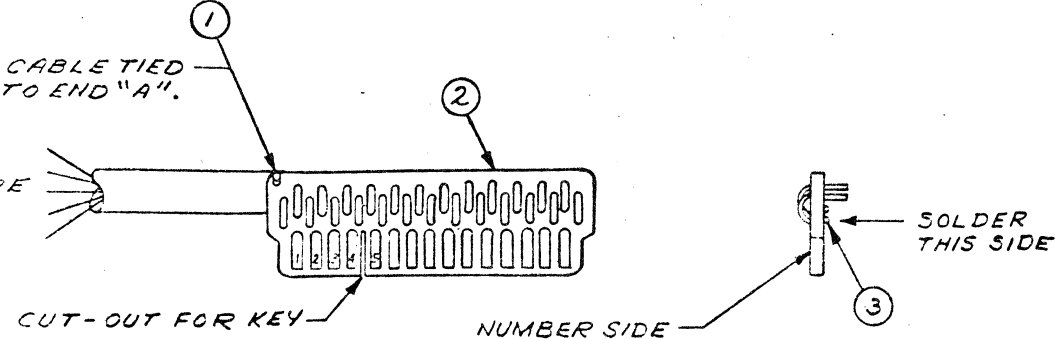

					SEE NOTE 2			
W.L. NO.	COLOR CODE	FROM 5223 PIN NO.	WIRED ROM (PC 5969) SIGNAL	MOD. 600 TO D6193-1 SEE BELOW	MOD. 1200 TO D6165-1	MOS ROM (PC 6293) SIGNAL	MOD. 600 TO D6193-1 PIN NO.	MOD. 1200 TO 6165-1
600-3001	BROWN	1	SUB	A7-10				
600-3022	PINK	2	JAD ₈	C7-J				
600-3003	ORANGE	3	JAD ₇	C7-K				
600-3004	YELLOW	4	JAD ₆	C7-H				
600-3005	GREEN	5	JAD ₅	C7-F				
600-3006	BLUE	6	JAD ₄	C7-D				
600-3007	VIOLET	7	JAD ₃	C7-E				
600-3008	GRAY	8	JAD ₂	C7-C				
600-3009	WHITE	9	JAD ₁	C7-B				
600-3090	WHT/BLK	10	JAD ₀	C7-A				
600-3091	WHT/BRN	11	JH ₂	B7-M				
600-3072	VIO/RED	12	JH ₁	B7-N				
600-3093	WHT/ORN	13	JH ₀	B7-L				
600-3094	WHT/YEL	14	JL ₂	B7-S				
600-3095	WHT/GRN	15	JL ₁	B7-R				
600-3901	WHT/BLK/BRN	A	ST ₀	A4-6				
600-3902	WHT/BLK/RED	B	ST ₁	A4-5				
* 600-2000	BLACK	C	ROM GND.	C3-13				
600-3904	WHT/BLK/YEL	D	ST ₂	A4-4				
600-3905	WHT/BLK/GRN	E	ST ₃	A4-3				
600-3906	WHT/BLK/BLU	F	KK ₀	B6-1				
600-3907	WHT/BLK/VIO	H	KK ₁	B6-2				
600-3908	WHT/BLK/SRY	J	KK ₂	B6-3				
600-3097	WHT/VIO	K	JL	C7-4				
600-3080	GRY/BLK	L	Jad ₁	C7-8				
600-3081	GRY/BRN	M	Jad ₂	C7-7				
600-3082	GRY/RED	N	Jad ₃	C7-5				
600-3083	GRY/ORN	P	CL	A4-5		NOT USED		
600-3084	GRY/YEL	R	ST	A5-L		RS	A5-P	6174-1 B ₃
600-3085	GRY/GRN	S	JL ₀	B7-P				

NOTE:
1. ALL WIRES ARE 26 GAUGE EXCEPT AS
INDICATED BY "*", WHICH IS 24 GAUGE.
2. ALL SIGNAL AND SOLDER POINTS ARE
THE SAME AS THAT FOR WIRED ROM,
EXCEPT SIGNAL & SOLDER POINTS LISTED.

PIN NUMBER
CONNECTOR POSITION NUMBER
CONNECTOR ROW NUMBER

TOL. EX. AS NOTED .XX ±.010 FRAC. ±1/ .XXX ±.008 ANG. ±		WANG LABORATORIES INC.	
MATERIAL		MODEL NO. 1200/600	DRAWN F.S.S. 8-27-73 CHECKED
FINISH		TITLE ROM CONNECTOR CABLE (P2)	
SCALE		W.O. NO. 220-0075	DWG. NO. 6193-3 REV. 2

8-86193 ON 348